


# Sideview Pixel COB led strips-Surrounding light

## Features&Application

- Break-Point signal continuously
- The led circuit adopt COB technology
- Surrounding light baffle design
- Low Energy High brightness
- Edge Decorative lighting
- Scenic Highlights

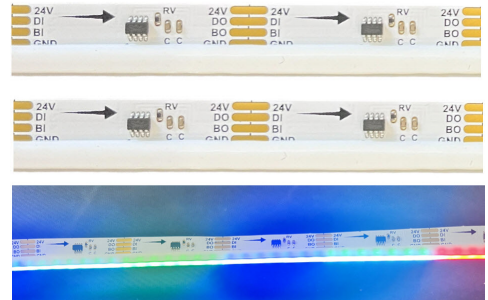

## Technical data

- LED Type COB Encapsulation
- LED Life Span 50000hours
- Chips Per meter 768Chips/m
- Pixel per meter 32Pixel/m
- SPI Protocol GE1603R
- **Special Function Break point signal resume**
- Input Voltage 24V DC
- Power consumption Max 19W/m
- Emitting Color Side Emitting RGB
- PCB Thickness 2oz
- PCB Width 10mm
- PCB Color white
- Optional IP Rating IP20
- Cutting Unit length 31.25mm/1.23"
- lead wire JST SM Connector
- Standard length 5M/Reel




<b>GE1603R Protocol spec:</b>
Data Format 24bit: R7-0,G7-0,B7-0
Color order: RGB
Timing(TH+TL≥1.25μs)
T0H=0.20-0.35μs , T1H=0.55-1.0μs
T0L=0.6-1.5μs ,T1L=0.3-1.5μs
Trst low level time>350μs
Compatible with SK6812 Protocol

## Luminous Data

Red: 180Lm/m                      Green:360Lm/m                      Blue:120Lm/m

## Physical Dimensions

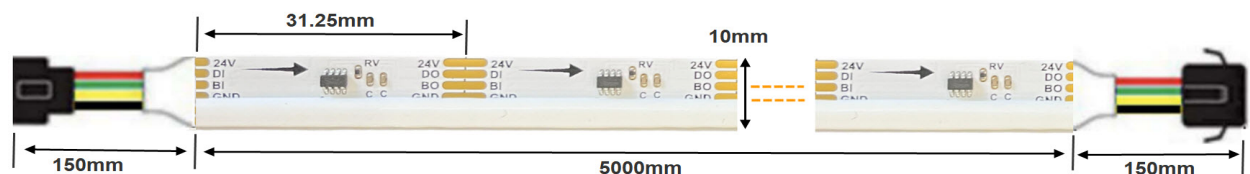

**Disclaimer :** Greeled Subject to change without no excepted. Always make sure to use the most recent release.