

# Digital Sideview led strips

## Features&Application

- Sideview individually addressable led tape
- **The led circuit with enhanced solder pad**
- Low Energy High brightness
- inseting into flooring and signage
- Edge Decorative lighting
- Scenic Highlights

## Technical data

- LED Type SMD4020 side Emitting
- LED Life Span 50000hours
- Chips Per meter 144leds/m
- Pixel per meter 144Pixel/m
- SPI Protocol SK6812
- Input Voltage 5V DC
- Power consumption Max 21W/m
- Emitting Color RGB
- PCB Thickness 3oz
- PCB Width 8mm
- PCB Color white/black
- Optional IP Rating IP20/IP65/IP67
- Cutting Unit length 6.94mm/0.273"
- lead wire JST SM Connector
- Standard length 1M/pc


## Digital Sideview 144Pixel/m RGB



## Luminous Data

Red: 240Lm/m                      Green:480Lm/m                      Blue:196Lm/m

## Physical Dimensions

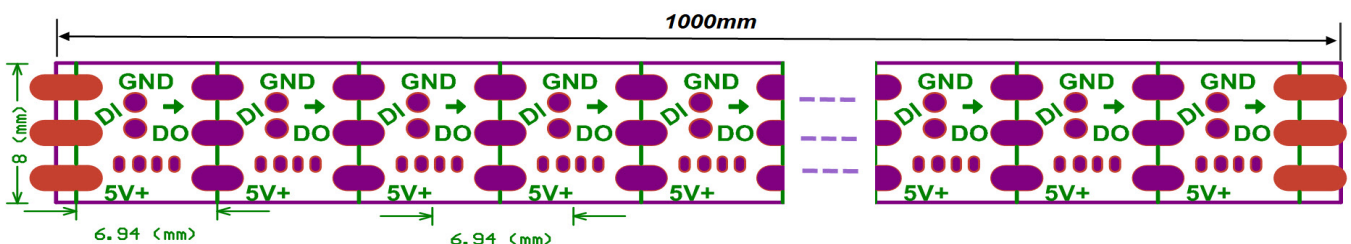

**Disclaimer** : Greeled Subject to change without no excepted. Always make sure to use the most recent release.