

Digital Sideview led strips

Features&Application

- Sideview individually addressable led tape
- **The led circuit with enhanced solder pad**
- Low Energy High brightness
- inseting into flooring and signage
- Edge Decorative lighting
- Scenic Highlights

Technical data

- LED Type SMD4020 Side Emitting
- LED Life Span 50000hours
- Chips Per meter 60leds/m
- Pixel per meter 60Pixel/m
- SPI Protocol SK6812
- Input Voltage 5V DC
- Power consumption Max 9.0W/m
- Emitting Color RGB
- PCB Thickness 2oz
- PCB Width 5mm
- PCB Color white/black
- Optional IP Rating IP20/IP65/IP67
- Cutting Unit length 16.66mm/0.66"
- lead wire JST SM Connector
- Standard length 5M/Reel




Luminous Data

Red: 100Lm/m

Green:200Lm/m

Blue:80Lm/m

Physical Dimensions

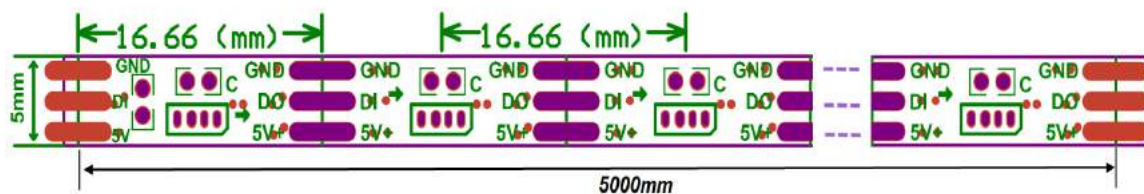

Disclaimer : Greeled Subject to change without no excepted. Always make sure to use the most recent release.